


Using Kiosk Mode on URC Keypads

Last Modified on 06/06/2023 5:32 pm EDT

Using Kiosk Mode on URC Keypads

URC Accelerator 3 software provides countless options to configure and optimize settings to achieve performance and flexibility for almost any application.


This article details the steps required to set and use the **Kiosk Mode** on URC Keypads using the Accelerator 3 software.

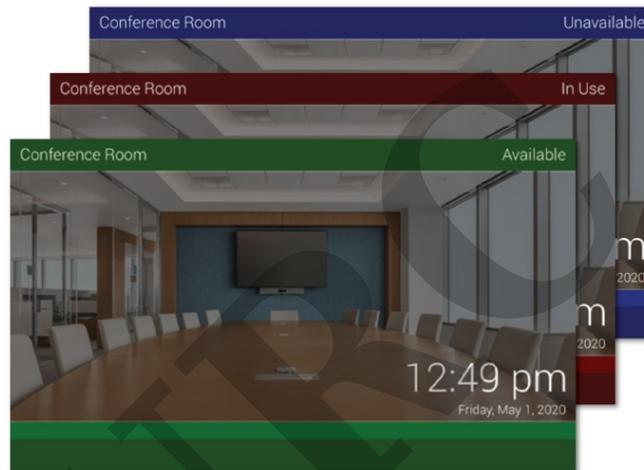

What is Kiosk Mode?

Selecting and enabling the **Kiosk Mode** on a URC keypad will have the keypad display **ONLY** the selected module interface. The user will not be able to exit it or control any functions outside of what the module allows.


The option only appears for compatible client devices. The first URC module that can be selected for Kiosk Mode is the [Microsoft Outlook Conference Room Scheduler](#) module. Other modules will follow in the future that may benefit from enabling this feature.

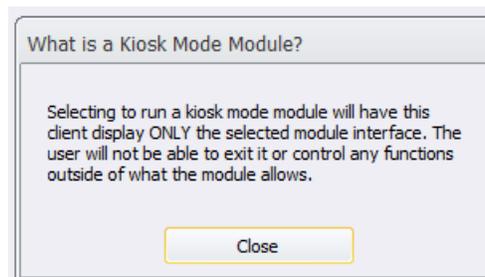

Enabling Kiosk Mode

1. Using the projects Project Tree, select the compatible URC keypad, right-click on the device and

then select Properties:

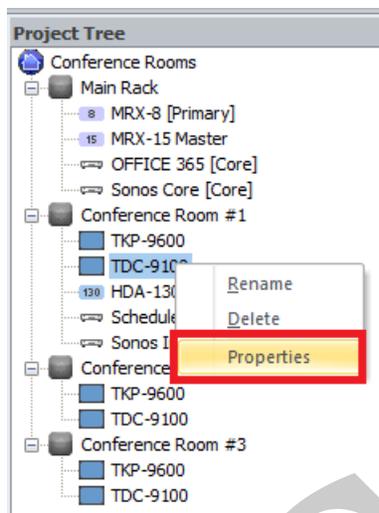

2. A new window opens. The Kiosk Mode option is labeled "Run Kiosk Mode Module" and operates as a drop-down menu that is populated with compatible modules and allows selection of (only) one item. When no items are selected the option should display "None".

The example below shows the [Microsoft Outlook Conference Room Scheduler](#) module listed as "Scheduler".

Remote/Keypad Properties

Name: TKP-9600

MAC Address: 00:00:00:00:00:00

IP Address: (DHCP)

Custom User Interface

Main Menu : Ribbon Grid

Submenu Thumbnails : Yes No

Main Button Jump : Main Menu

Device Layout Panels : 6 panels

Power Button Mode : Direct Power Off

Run Kiosk Mode Module : None ?

Keypad Orientation : Landscape Portrait

Rooms Module

Default

Custom List

Conference Room #1

Main Rack

Conference Room #2

Conference Room #3

Disable

Buttons: First, Up, Down, last

Camera Popups

Enable on screen camera popups Settings

Disable on screen camera popups

Use the camera service

Do not show this window when this model is added to a project

Buttons: Apply, Cancel

3. Perform the operation listed above for any individual devices in the project that require the Kiosk Mode to be enabled. Each device needs to be selected individually.

Once the installer downloads to the system, all the clients (keypads) set to Kiosk Mode will open up to the assigned module from the software.

Please Note: The only way to remove Kiosk Mode is to change the client's parameters in the software and re-download to the device.

Pro Tip: The compatible two-way module needs to be imported into Accelerator 3, the software restarted and the module added to the project before the options shown above will be available to the programmer.

Compatible URC Interfaces

TKP-5500

TKP-5600
TKP-7600
TKP-9600
TDC-7100
TDC-9100
Android Phone
Android tablet
iPhone Mobile
iPad Mobile

Additional Information & Resources:

To learn more about Accelerator 3 configuration and programming, please see the Accelerator 3 online [Programming Guide](#).

URC