Master Resetting The THZ-100
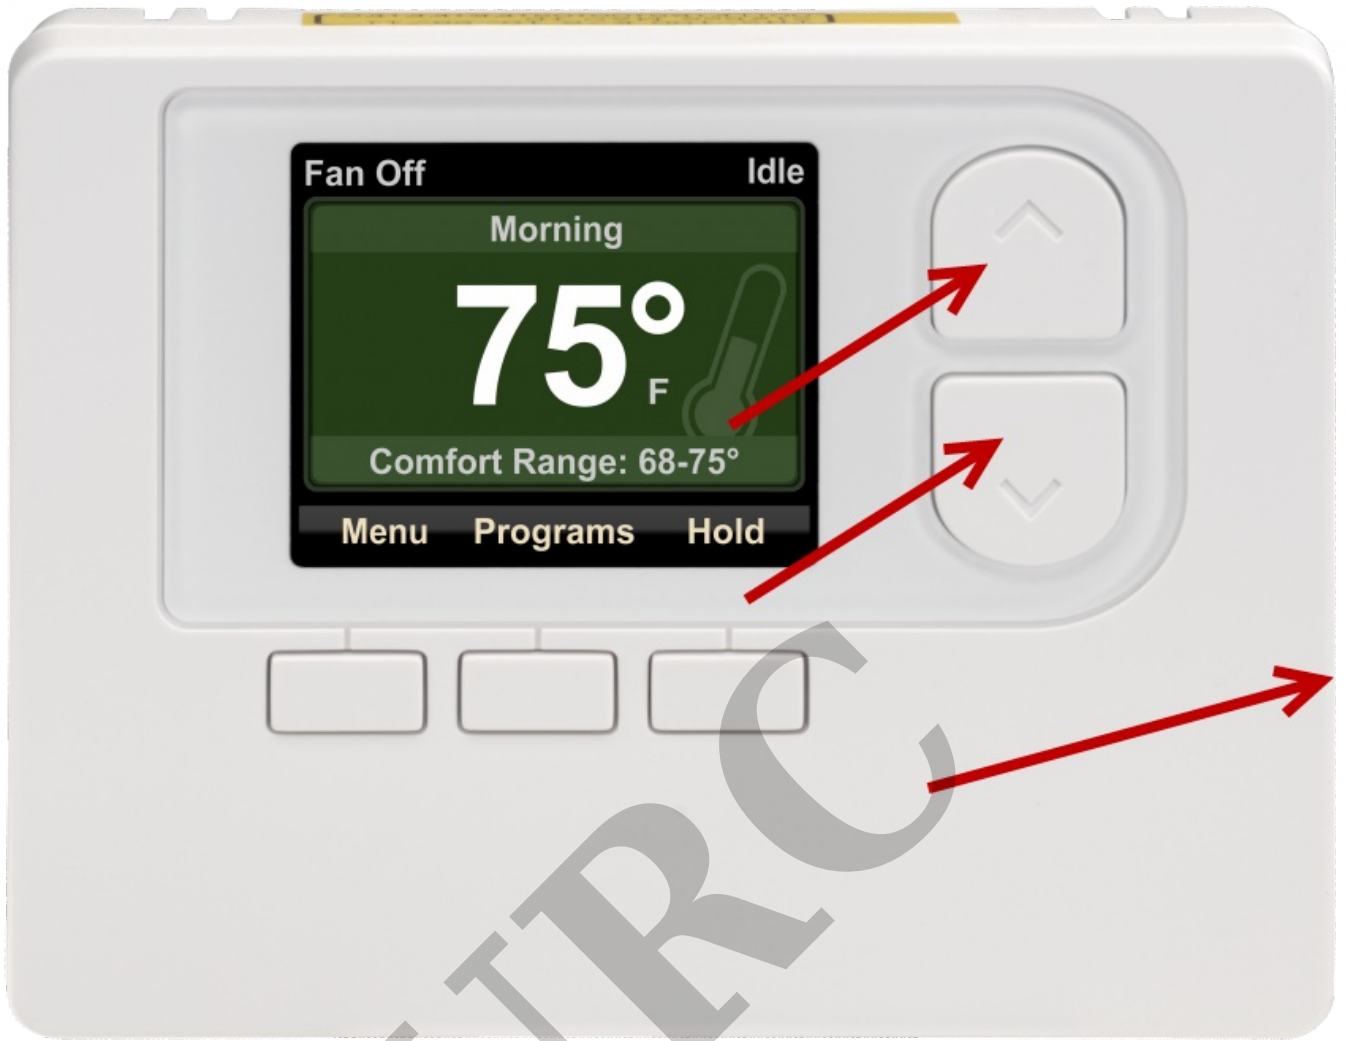
If the THZ-100 locks up or requires a factory default, perform the steps below. NOTE: This deletes any and all data, settings, schedule, etc. Follow the directions below to **reset** the **THZ-100**.

Master resetting the **THZ-100** requires a small screw driver, paper clip, or similar device.

1. Hold down the **Up and Down Arrows** on the front of the **THZ-100**.

2. Insert the screw driver into the recessed button on the right side of the **Thermostat**. Hold it down for **3 seconds,** and **release**. Once the **reset button** is released a **progress bar** starts to scroll at the button of the **display**.

3. It is now safe to remove your hands from the **Up and Down Arrows.** The **Thermostat** reboots to is **factory defaulted state.**

as

If you require any additional information or have any questions, please do not hesitate to contact our **technical support** team at **914-835-4484.**