

# Using XL Graphics on URC Interfaces

Last Modified on 08/09/2023 6:06 pm EDT

URC touch screen keypads and mobile apps now have a new **Main Menu “XL”** display mode available in the Device Properties\Custom User Interface settings section.

This article details how to configure and use the **Main Menu “XL” display mode** in the Accelerator software.



This Main Menu “XL” display mode is the default selection on the TDC-5100 and may be selected on these devices:

TDC-5100  
TKP-5600  
TDC-7100  
TKP-7600  
TKP-8600  
TDC-9100  
TKP-9600

Android Phone and Android Tablet

-URC Mobile 2 app version 1.6.31.0 (minimum version required)

iPhone Mobile and iPad Mobile

-URC Mobile 2.5 app version 1.2.137 (minimum version required)

**Note: Accelerator 3 Update Version 3.03.0509.1 is the minimum software version required to use XL graphics. This update was made on 05/23/2023.**


*PLEASE NOTE: URC very strongly recommends that you upgrade systems from a local network connection if they have not been updated since July 5, 2022 (version 3.02.0628.1) locally at least once.*

*Please visit the [Accelerator 3 Update History](#) page for additional information.*


### Main Menu “XL” Display Mode Update Procedure

To change the Main Menu to the XL graphics style, complete the following steps:


Step #1 - Select the desired URC device in the project tree. This will need to be done individually for all supported user interfaces except for the TDC-5100. XL mode is selected by default on that device:

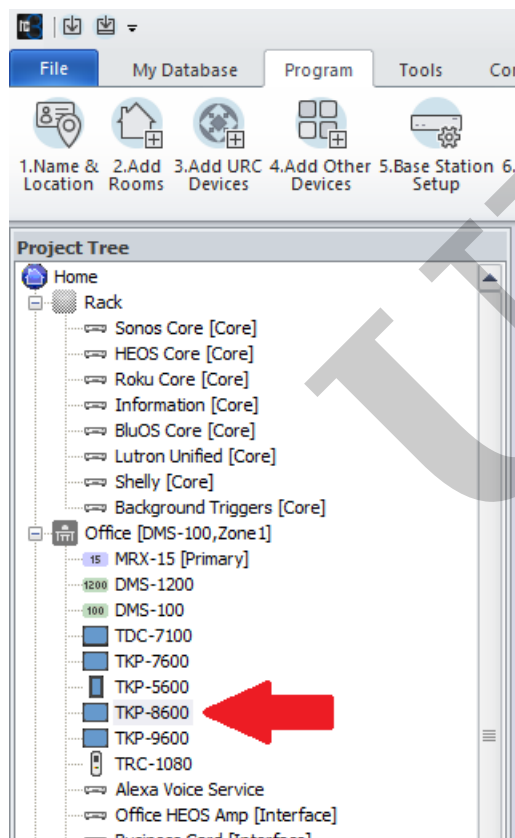


Step #2 - Go to Step #7-Properties Manager. In the Custom User Interface section, you will have the option to select Ribbon, Grid or XL. Select the XL radio button:

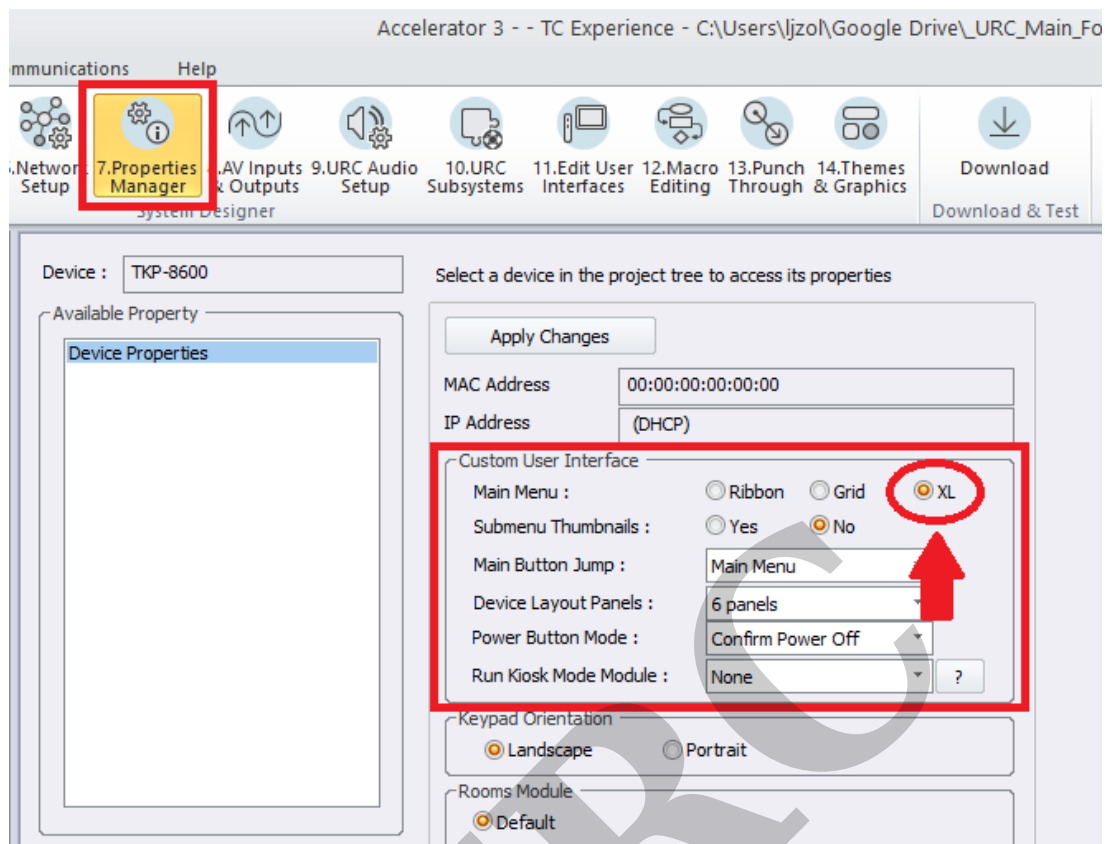


Step #3 - Click on the Apply Changes button to verify your UI selected:

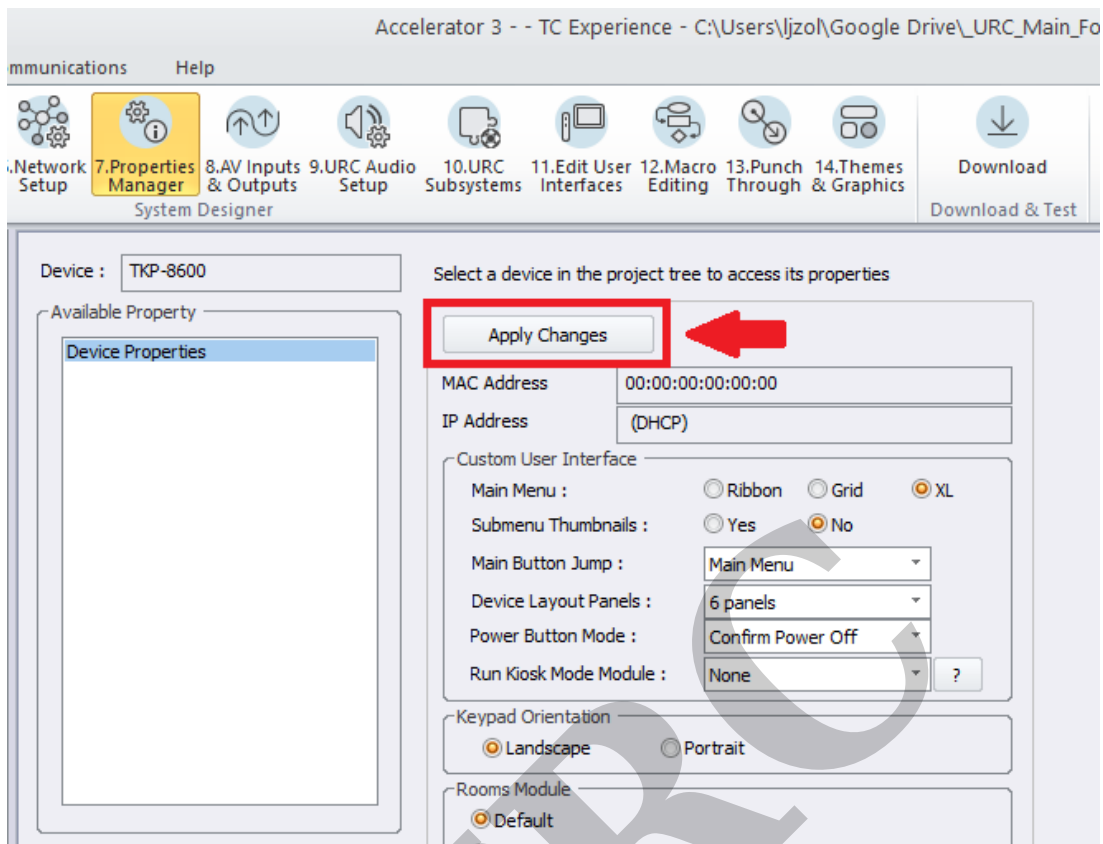

Step #4 - Select Accelerator Step #11 and click on the Accelerate button. (Accelerate in Step #12-Macro Editing if any other changes have been made):

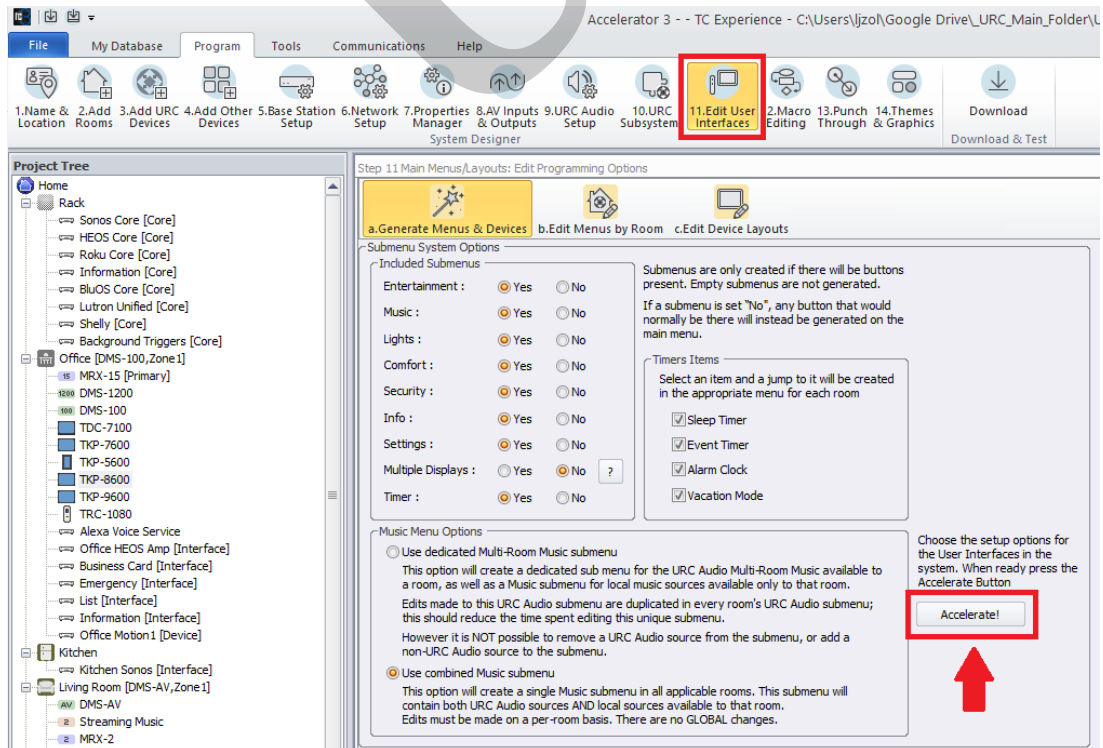

Step #5 – Select the Download button and download to your devices & system. Make sure to select for download all the User Interfaces that you have changed to the XL graphics:

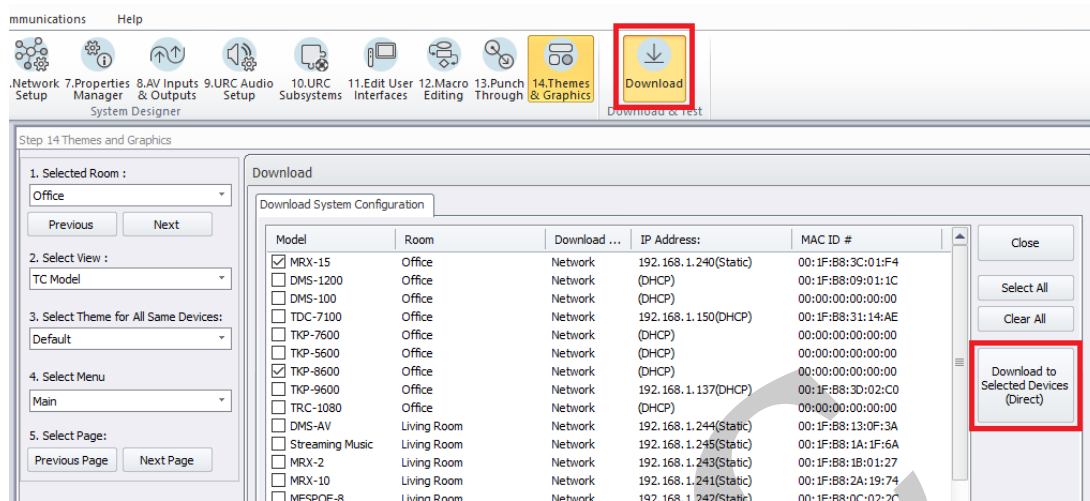

### Example 1:

The example below shows that, by using the above procedure, we would be able to change the look for the **Main Menu** from the **Ribbon** to the **XL** mode.

*Note: For this example, URC Mobile for iOS was used.*

### BEFORE:

Note the **Main Menu** style **prior** to changing. This is the **Ribbon** mode.

Living Room



Now Playing



Entertainment



Music



Lighting



Security



Timer

Sunrise: 7:02 am



5:53 pm



Mute




Main



Ribbon Mode-Landscape Mode

URUC

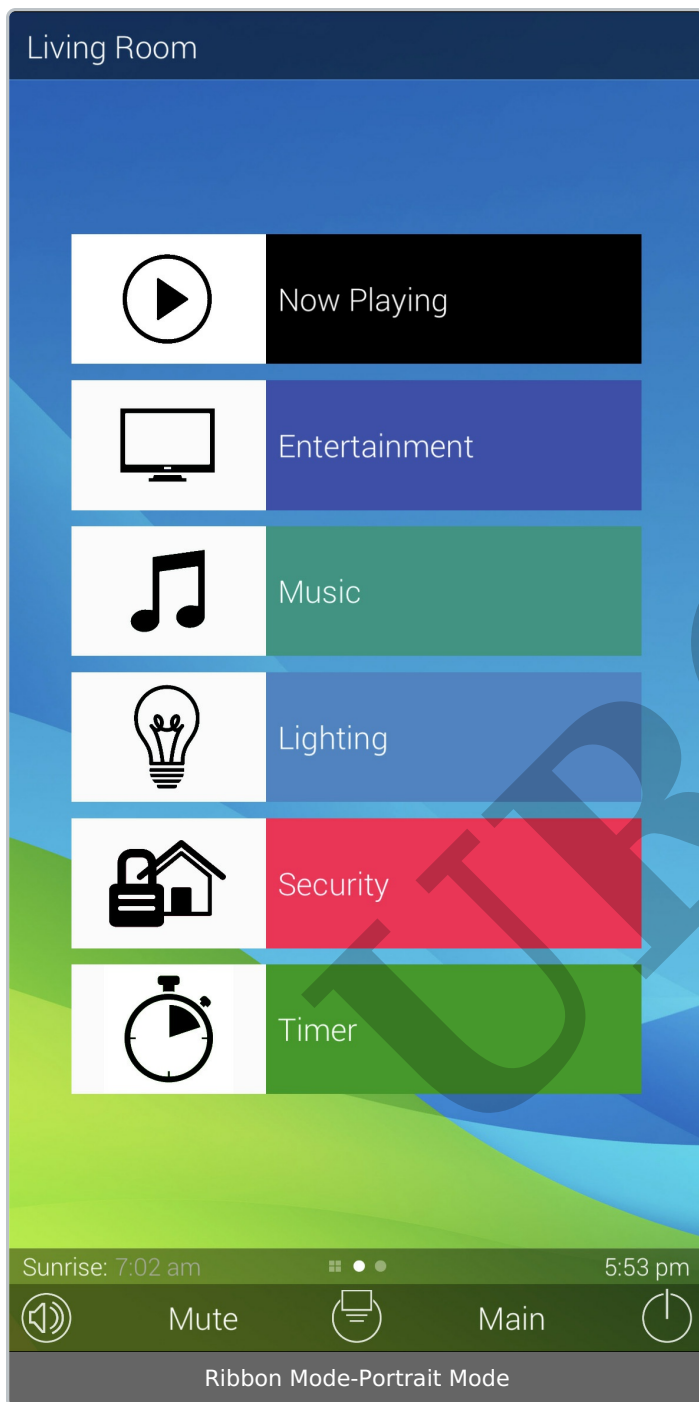

**AFTER:**

Note the **Main Menu** style **after** changing. This is the **XL** mode.

Living Room



Now Playing



Entertainment



Music



Lighting



Security



Timer



Fireplace



Climate



Home Mode



Shelly Devices



Power Menu



Settings

Sunrise: 6:00 am

12:02 pm



Mute



Main



XL Mode-Landscape Mode

URB





### Example 2:

The example below shows the TDC-5100 and the look for the **Main Menu** when using the *Ribbon* and the **XL** mode.

**Main Menu** using the *Ribbon* mode.



**Main Menu** using the *XL* mode.



### **Additional Information & Resources:**

Please refer to the article [Adding Custom Background Images](#) for additional information on adding background images in Accelerator 3.

Download the Total Control [Graphics Expansion Pack](#) from the URC Dealer Portal (You must first be logged-in to download the file).

Download the Total Control [Flat Vector Icon Sets](#) from the URC Dealer Portal (You must first be logged-in to download the file).

To learn more about Accelerator 3 configuration and programming, please see the Accelerator 3 online [Programming Guide](#).